RUDRAPRASAD CONSULTANTS

NAME OF WORK: Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division

DETAILED PROJECT REPORT

SUBMITTED TO B.B.M.P. BANGALORE

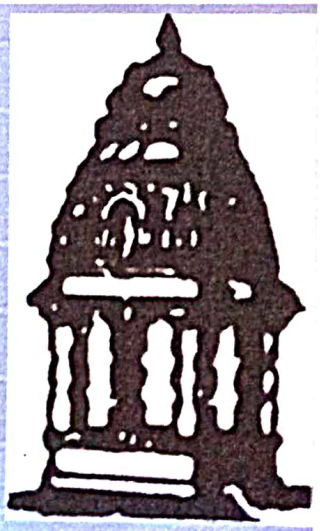

#3, 7th Main Malleswaram, Bangalore – 560003
Telefax: 9180 23444801, Mobile: 91 9972924526 Web: www.arkstructure.com e-mail: rechan6630@yahoo.co.in

BRUHAT BENGALURU MAHANAGARA PALIKE

DETAIL PROJECT REPORT

NAME OF WORK: Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division

RUDRAPRASAD CONSULTANTS BANGALORE

Rudraprasad consultants
No.3, 7th Main,
Malleswaram Bengaluru-560003

Assistant Executive Engineer
Byatarayanapura Sub Division
Bengaluru

Table of Contents

1.	**INTRODUCTION**	
1.1	General	1
1.2	Topography	4
1.3	Project Objective	4
1.4	Outline of the project	5
1.5	Contents of Detailed Project report	5
2.	**DESCRIPTION OF PROJECT ROADS**	6
2.1. General		7
2.2. Existing Project Road		9
	2.2.1. Terrain	9
	2.2.2. Alignment	9
	2.2.3. Climate	9
	2.2.4. Carriage Way Width	9
	2.2.5. Pavement Condition	10
	2.2.6 Land Use along the Project Highway	12
2.3	Traffic Flow Conditions	12
2.4	Cross Drainage Structures and Side Drains	12
2.5	Utilities	13
2.6	Trees	13
3.	**CONCLUSIONS**	14
3.1	General	15
	3.1.1. Geometric Improvements	15
	3.1.2. Strengthening of Existing Pavements	15
3.2.	Improvement Proposal for Carriageway	16
3.3.	Improvement Proposal for Side Drains	17
3.4.	Improvements Related to utility, Road Furniture and appurtenances	17

4	**COST ESTIMATES**	18
4.1	Detailed Cost Estimate	19
4.2	General	19
4.3	Basic rates	19
4.4	Utility Relocation	19
4.5	Project Management and Quality Control	19
4.6	Project Cost	19
5.	**DETAILED ESTIMATES**	
6.	**DRAFT TENDER SCHEDULE**	
7.	**BILL OF QUANTITIES**	

ANNEXURES

- **TYPICAL CROSS SECTION**
- **ROAD PHOTOGRAPHS**
- **WARD MAP**
- **KEY MAP**

INTRODUCTION

CHAPTER – 1

INTRODUCTION

Detailed Project Report

1.1 General

India's pride, Bengaluru is nearly 500 years old and has grown from a small time settlement when KempeGowda, the architect of Bengaluru, built a mud fort in 1537 and his son marked the city boundaries by erecting four watch towers. Bangalore is the capital and the largest city of Karnataka. It is also called "Garden City" for its beautiful gardens, flowers and trees which flourish in each and every street. Bangalore is India's third largest city, fifth most populous city and fifth-most populous urban agglomeration. The majority of the city of Bangalore lies in the Bangalore Urban district of Karnataka and the surrounding rural areas are a part of the Bangalore Rural district. In recent days Bangalore has transformed itself from a "pensioners' paradise" to a modern thriving "cosmopolitan metropolis". Today Bengaluru has grown well beyond those four towers into a sprawling metropolis of more than 6 million people and is referred to as the "Silicon Valley" of India.

As a large and growing metropolis, Bangalore is home to many well-recognized colleges and research institutions in India. Numerous public sector heavy industries, software companies, aerospace, telecommunications, and defence organizations are located in the city. Bangalore is also well known as a hub for India's Information Technology sector. It is among the top 10 preferred entrepreneurial locations in the world. Bangalore is a major economic and cultural hub and the second fastest growing major metropolis in India. Today 35 percent of India's software export is done at Bangalore. Rapid population growth in Bangalore was brought about by the IT and other associated industries, leading to an increase in the population to about 1.5 million, with an annual growth rate of 10-14%.every year.

Bangalore today is obviously one of the most sought after cities in the country with the rapid growth in the IT industry and other associated industries the rise in the number of job opportunities in the city. With the rising population in the city there is also a corresponding increase in the number of vehicles in the city. Bangalore's vehicular traffic has increased manifold, with 1.6 million registered vehicles in the city — the second highest for an Indian city, after New Delhi. Bangalore in particular is that there is very little scope for expansion of

roads and the need to use existing roads for smoothmovement of vehicles is even more pronounced. It thus becomes mandatory for the administration to ensure better parking facilities. With the increase in population and the expansion of the city, the problem of connectivity of the populace has arisen. Quite obviously personalized modes of transport have grown at a tremendous rate and two wheelers along with the cars. The maintenance and construction of roads to address the growing traffic in the city has been a challenge to the BDA and the BBMP. Development of the city road infrastructure has revolved around imposing one-way traffic in certain areas, improving traffic flow in junctions, constructing ring roads, bridges, flyovers and other grade separators.

Bangalore's road network exceeds 3,000 km (1,800 mi) and consists of ring roads, arterial roads, sub-arterial roads and residential streets. The city road network is mainly radial, converging in the centre. Many of Bangalore's erstwhile colonial and town streets were developed into commercial and entertainment areas after independence. The B.V.K Iyengar Road became the retail hub of Bangalore, while MG Road, Commercial Street and Brigade Road became important shopping, recreation and corporate areas. But for MG Road, other roads in and around the erstwhile Parade Ground remain narrow, winding roads. The unplanned nature of growth in the city resulted in massive traffic gridlocks that the municipality attempted to ease by constructing a flyover system and by imposing one-way traffic systems. Some of the flyovers and one-ways mitigated the traffic situation moderately but were unable to adequately address the disproportionate growth of city traffic. Some of the flyovers and one-ways mitigated the traffic situation moderately; however the volume of traffic continues to grow at an annual rate of between 7- 10%. The Outer Ring Road was initially constructed to ease truck congestion in the city; however the growth of suburbs reduced the positive impact of the ring road. BDA is laying additional lanes on many of the major roads around Bangalore. The Peripheral Ring Road is designed to be concentric to the Outer Ring Road and covers 108.9 km. The Hosur Road, which connects Bangalore to the Electronics City, is heavily congested and is part of the National Highway (NH7), therefore witnesses' heavy truck traffic as well.

Export Promotional Industrial Park (EPIP) in Bangalore is the place which entrepreneurs love to be identified with. EPIP is in the just next door of M/s ITPL, an internationally acclaimed technology park promoted by KIADB with TATAs and Singapore consortium of industries.

This park comes with state-of-the-art infrastructure facilities. Following are the few of many features of this prestigious location

- Location in unpolluted, lush green atmosphere, just 17 Kms. from the heart of the city and 9 Kms. from Bangalore Airport.
- Total extent of developed land is 547 acres with well-laid asphalted roads & drainage systems.
- Assured water supply & dedicated power lines with Sodium Vapor street lighting.
- KTPO Exhibition Complex coming up in the area. Hospital with ultra modern facilities and well-equipped inland container depots.
- Well connected with public transport with host of secondary infrastructure facilities like telephones, Posts & Telegraph, Banks, ATMs, Convention center. Cafeterias, Travel operators.

EPIPs are the destination for industrial units who have plans to export at least 33% of their output in value offshore. These parks come with well-planned infrastructure, which is hallmark of KIADB's service. These parks are established with the sanction of Union Govt, of India to give impetus to growth of exports in the state. Government of Karnataka offers host of incentives and concessions to export oriented units.

The Bruhat Bengaluru Mahanagara Palike (BBMP, Greater Bangalore Municipal Corporation vide Government of Karnataka Notification no. UDD 92 MNY dt: 2.11.2006) is in charge of the civic administration of the city. It was formed in 2007 by merging 100 wards of the erstwhile Bangalore Mahanagara Palike, with seven neighbouring City Municipal Councils (Rajarajeshwari Nagara, Dasarahalli, Bommanahalli, Krishnarajapuram, Mahadevapura, Byatarayanapura and Yelahanka), one Town Municipal Council (Kengeri) and 111 villages around Bangalore. The BBMP Is run by a city council composed of 250 members, including 198 corporators representing each of the wards of the city. The BBMP works with the Bangalore Development Authority (BDA) and the Agenda for Bengaluru Infrastructure and Development Task Force (ABIDe) to design and implement civic projects.

The BBMP has taken up an ambitious plan to upgrade Arterial & Sub Arterial Road network in these newly added areas of BBMP and Development, maintenance and management of high quality network in EPIP zone roads at Mahadevapura Zone, where the traffic intensity has increased significantly and to augment the capacity for safe, efficient and free flow of

traffic. Roads in and around EPIP zones are being upgraded to arterial road standards which will result in enormous increase in the traffic. Tech city, a preferred choice of many global corporations to position their businesses. It has indeed been a challenge to the government agencies including the urban local bodies to meet up with these unprecedented demands and challenges of the global companies and its citizens demanding international class 'citizen services'.

The project consists of improvements to roads and drains, in ward 06 of Byatarayanapura Division, which includes 46 roads. The existing roads need to be improved, since they are not in good condition and to avoid inconvenience to people living in these wards. The total length of all Drains in ward 06 is 3835 m (3.835 Km) & the total length of all CC Road in Ward 06 is 1550.50 m (1.550 Km). The ward maps in which the respective roads are highlighted are enclosed with this report.

1.2 Topography

Bangalore is situated in the southeast of Karnataka, at an average elevation of 920m above mean sea level. It is positioned at 12.97°N, 77.56°E and covers an area of 2, 190 sq.km. Bangalore Urban District borders with Kolar District in the northeast, Tumkur District in the northwest, Mandya District in the southwest, Chamarajanagar District in the south and the neighboring state of Tamil Nadu in the southeast. The Bangalore Urban District is divided into three taluks; Bangalore North, Bangalore South, and Anekal. The Bangalore North taluk is a relatively level plateau, while the Bangalore South taluk has an uneven landscape with intermingling hills and valleys.

1.3 Project objective

- The main objective of the study is to establish the technical & economical viability of the project roads by rehabilitation, strengthening, asphalting, concrete including culverts and improvements of side drains of the existing roads.
- The detailed project study includes submission of the detailed project report for the project as per standards.

1.4 Outline of the project

The consultant is required to conduct various engineering Surveys, Investigate, Carry out Detailed Design and Viability of the project. **Prepare Detailed Project Report**, based on Detailed Design and Bill of Quantities.

1.5 Contents of Detailed Project Report

This Detailed Project Report is submitted in 8 chapters dealing with different aspect of the study of the project road.

Chapter description

1	Introduction
2	Socio-Economic Profile
3	Description of project
4	Methodology
5	Design Standards
6	Pavement Overlay design
7	Conclusion
8	Cost estimate

DESCRIPTION OF PROJECT ROADS

CHAPTER - 2

DESCRIPTION OF PROJECT ROADS

2.1 General

The project consists of bad roads in Ward No.6, Byatarayanapura Division, which includes 46 roads in. The existing roads need to be improved since there are formation of Cracks, Rutting and Potholes which are a hindrance to the free movement of traffic, in turn causing inconvenience to the people of the respective wards. The total length of all Drains in ward 06 is 3835 m (3.835 Km) & the total length of all CC Road in Ward 06 is 1550.50 m (1.550Km), Majority of roads pass through residential and commercial area. Below are the lists of the bad roads in their respective wards.

- **List of Roads**
- **List of Roads in Ward No. 06 (Bharath Nagar - Abu Bakar Masjid Road)**
- Abu Bakar Masjid Road - Sameer saloon Road
- Abu Bakar Masjid Road - Connecting Road
- Abu Bakar Masjid Road - Cross Road-1
- Abu Bakar Masjid Road - Cross Road-2
- Abu Bakar Masjid Road - Cross Road-3
- Abu Bakar Masjid Road - Cross Road-4 (LHS)
- Abu Bakar Masjid Road - Cross Road-5 (RHS)
- Abu Bakar Masjid Road - Cross Road -6 (LHS)
- Abu Bakar Masjid Road - 7th A Cross Road
- Abu Bakar Masjid Road - 6th A Cross Road (Amarjyothi Layout)
- Abu Bakar Masjid Road - 6th A Cross Road (Cross Road 1)
- Abu Bakar Masjid Road - 6th A Cross Road (Cross Road-2)
- Abu Bakar Masjid Road - 6th A Cross Road (Cross Road-3)
- Abu Bakar Masjid Road - Bismilla Chicken Centre Road
- Abu Bakar Masjid Road - Rasheeda Mazid Road
- Abu Bakar Masjid Road - 4th Cross Durgamba Road
- Abu Bakar Masjid Road - 6th A Cross Road (Cross Road-3)
- **List of Roads in Ward No. 06 (N R Bike Point Road)**
- N R Bike Point Road - Cross Road-1

- N R Bike Point Road - Cross Road-2
- N R Bike Point Road - Cross Road-3
- N R Bike Point Road - Cross Road-4
- N R Bike Point Road - Cross Road-5
- N R Bike Point Road
- **List of Roads in Ward No. 06 (Sadiq Layout)**
- Sadiq Layout - 3rd Cross Road (left Side)
- Sadiq Layout - 4th Cross Road(Left Side)
- Sadiq Layout - 5th Cross Road (LHS)
- Sadiq Layout - 5th CrossRoad (RHS)
- Sadiq Layout - Mamatha Medicals Road (LHS)
- Sadiq Layout - 1st Cross Road (RHS) Near Mamatha Clinic
- Sadiq Layout - 6th Cross Road (LHS)
- **List of Roads in Ward No. 06 (Fathima Furniture Road)**
- Fathima Furniture Opp Road (RHS)
- Fathima Furniture Road (LHS)
- Fathima Furniture Road - Cross Road-1
- Fathima Furniture Road - Cross Road-2
- Fathima Furniture Road - M S Pharma Opp Road
- Fathima Furniture Road - Cross Road
- Fathima Furniture Road - Cross Road-2
- Fathima Furniture Road - Cross Road
- Sarvari Rice Trader Opp Road
- M S Darbar Biryani Centre Opp Road
- **List of Roads in Ward No. 06 (Fathima Layout)**
- Fathima Layout- 7th Cross Road
- Fathima Layout- 8th Cross Road
- Fathima Layout- Connecting 7th & 8th Cross
- **List of Roads in Ward No. 06 (Anam Enclave Layout)**
- Anam Enclave Layout - Govt Urdu Higher Primary School (Aryan Pebble Bay Apartment)
- **List of Roads in Ward No. 06 (Abu Bakar Masjid to Balloon Factory Connecting Road)**

- Abu Bakar Masjid to Balloon Factory Connecting Road - Cross Road-1
- Abu Bakar Masjid to Balloon Factory Connecting Road - Cross Road-2

2.2 Existing project roads

2.2.1 Terrain

Terrain is classified by general slope of the country across the alignment, based on this criterion majority of the project roads pass through Plain terrain.

2.2.2 Alignment

The existing roads have the carriage widths varying from 3.2 m to 5.5 m and the existing gradients of the project roads are within acceptable limits as per IRC: 86. Table 1 shows the list of project roads with their carriage way widths.

2.2.3 Climate

Due to its elevation, Bangalore enjoys a pleasant climate throughout the year, with temperatures ranging between 33°C and 16°C, with an average of 24°C. The summer heat is moderated by occasional thunderstorms and squalls. Bangalore receives adequate rainfall of about 860 mm from the Northeast Monsoon as well as the Southwest Monsoon. The wettest months are August, September and October.

2.2.4 Carriageway Width

The existing carriageway width varies from 3.2 m to 5.5 m. Details of carriageway width are as shown in Table 2.1 below,

Table 2.1 - LIST OF ROADS WITH THEIR CARRIAGE WAY WIDTHS

Sl.No	Name of the Road	Carriage Way Width in mm
Ward No.06		
	Bharath Nagar	
	Abu Bakar Masjid Road	
1	Sameer saloon Road	4.0
2	Connecting Road	3.6
3	Cross Road-1	3.6
4	Cross Road-2	3.6

5	Cross Road-3	4.5
6	Cross Road-4 (LHS)	4.2
7	Cross Road-5 (RHS)	4.8
8	Cross Road -6 (LHS)	5.0
9	7th A Cross Road	5.2
10	6th A Cross Road (Amarjyothi Layout)	4.2
11	6th A Cross Road (Cross Road 1)	3.5
12	6th A Cross Road (Cross Road-2)	3.3
13	6th A Cross Road (Cross Road-3)	3.8
	N R Bike Point Road	
14	Cross Road-1	5.0
15	Cross Road-2	5.2
16	Cross Road-3	5.0
17	Cross Road-4	5.0
18	Cross Road-5	4.9
	Sadiq Layout	
19	3rd Cross Road (left Side)	4.4
20	4th Cross Road(Left Side)	4.5
21	5th Cross Road (LHS)	4.4
22	5th CrossRoad (RHS)	4.8
23	Mamatha Medicals Road (LHS)	4.0
24	1st Cross Road (RHS) Near Mamatha Clinic	5.0
25	Fathima Furniture Opp Road (RHS)	5.0
	Fathima Furniture Road	
26	Cross Road-1	4.8
27	Cross Road-2	5.5
28	M S Pharma Opp Road	3.2
29	Cross Road	3.2
30	Cross Road-2	3.8
31	Cross Road	4.5
32	Cross Road	4.2

2.2.5 Pavement Condition

The existing pavement conditions are analyzed based on visual inspection as per IRC 81-1997 Table -1. The Roads as per the Visual Inspection were found to be in Good to Poor condition. This may be due to improper material in subgrade, compaction or movement of heavily loaded trucks. The summaries of pavement condition obtained by visual inspection are listed in Table 2.2 below.

TABLE 2.2: PAVEMENT CLASSIFICATION BASED ON VISUAL INSPECTION

Sl.No	Name of the Road	Road Condition
	Ward No.06	
	Bharath Nagar	
	Abu Bakar Masjid Road	
1	Sameer saloon Road	Poor
2	Connecting Road	Poor
3	Cross Road-1	Poor
4	Cross Road-2	Poor
5	Cross Road-3	Poor
6	Cross Road-4 (LHS)	Poor
7	Cross Road-5 (RHS)	Poor
8	Cross Road -6 (LHS)	Poor
9	7th A Cross Road	Poor
10	6th A Cross Road (Amarjyothi Layout)	Poor
11	6th A Cross Road (Cross Road 1)	Poor
12	6th A Cross Road (Cross Road-2)	Poor
13	6th A Cross Road (Cross Road-3)	Poor
	N R Bike Point Road	
14	Cross Road-1	Poor
15	Cross Road-2	Poor
16	Cross Road-3	Poor
17	Cross Road-4	Poor
18	Cross Road-5	Poor
	Sadiq Layout	
19	3rd Cross Road (left Side)	Poor
20	4th Cross Road(Left Side)	Poor
21	5th Cross Road (LHS)	Poor
22	5th CrossRoad (RHS)	Poor
23	Mamatha Medicals Road (LHS)	Poor
24	1st Cross Road (RHS) Near Mamatha Clinic	Poor
25	Fathima Furniture Opp Road (RHS)	Poor
	Fathima Furniture Road	
26	Cross Road-1	Poor
27	Cross Road-2	Poor
28	M S Pharma Opp Road	Poor
29	Cross Road	Poor
30	Cross Road-2	Poor

31	Cross Road	Poor
32	Cross Road	Poor

2.2.6 Land Use along the project highway

Land use along majority of roads is predominantly for built up area. The settlements are used for residential and commercial purposes.

2.3 Traffic flow conditions

Traffic on these project roads is of mixed type. Majority of roads only carry passenger vehicle most of the time, and there are also commercial vehicles ply on some roads. Commercial vehicles include 2-axle and 3-axle trucks and LCVs.

The intensity of traffic on this stretch is likely increase in future, the reason being:

- The Bangalore Mahanagara Palike became Bruhat Bangalore Mahanagara Palike after inclusion of 7 CMC, 1TMC & 111 Villages adjoining to the CMC areas vide Government of Karnataka Notification No. UDD 92 MNY 2006 dated 02.11.2006. To provide better transport facility, to improve the quality of urban civic services better roads are needed. At present the existing roads in these newly added areas are narrow without proper Drainage, Footpath, and Culverts etc. The BBMP has taken up an ambitious plan to upgrade Arterial & Sub Arterial Road network in these newly added areas of BBMP in view of providing better infrastructure.
- Roads in and around EPIP zones are being upgraded to arterial road standards which will result in enormous increase in the traffic.
- The number of commercial and residential plots in the given area is high.
- Rising traffic congestion is one of the key issues in the City. Though the length of roads available is good, the problem lies with the restricted widths.

2.4 Cross Drainage Structures and Side Drains

There are no major CD structures along the project road except for the cross roads. The condition of the existing CD structures is good.

2.5 Utilities

- **HT Lines**

  HT lines do not cross along the project roads

- **Light Poles**

  Large numbers of light poles are present along the project roads in regular intervals

2.6 Trees

The project roads consist of trees beside the carriageway at regular intervals. Also tree pits are constructed for all the trees on either side of the roads for watering the trees. Curb stones are laid all round the tree pits for protection

CONCLUSION

CHAPTER - 3

CONCLUSIONS

3.1 General

The primary data collected from the site provides a clear picture of the site conditions, and also gives us a good insight about the deficiencies and the scope for improvements. The primary data coupled with the good engineering expertise lead us in giving apt and economical recommendations for the improvements. A budget of Rs. 5,00,00,000/- (Rs. Five Crore Only) has been allocated for this project. Hence, the provisions of items made in the cost estimate are in consensus with the allocated budget. The improvement proposal includes the following:

3.1.1. Geometric Improvements:

- Improvements of existing carriageway
- Improvements to cross sectional elements
- Improvements to horizontal alignment
- Improvements to longitudinal profile

3.1.2. Strengthening of Existing Pavements:

- **Pavement Overlay design**
- Road Drainage
- Road Furniture and Appurtenances
- Pedestrian Facilities
- Aesthetics

The summary of improvement proposals along the project roads in Ward no.06 Conforming to Design Standards with all the Relevant Details such as Length and Width of existing roads, Plans and Construction Costs has been prepared. The details of improvement proposals are discussed in subsequent sections.

3.2. Improvement proposal for Carriageway

Since the majority of the roads are Arterial and sub-arterial roads where the Traffic intensity is less than 10msa, Table 3.1 shows the improvement proposals and pavement composition for the existing roads.

TABLE 3.1: IMPROVEMENT PROPOSAL AND PAVEMENT CONDITION DETAILS

RIGID PAVEMENT

Sl.No	Name of the Road	DLC (mm)	PQC (mm)
	Ward No.06		
	Bharath Nagar		
	Abu Bakar Masjid Road		
1	Sameer saloon Road	150	150
2	Connecting Road	150	150
3	Cross Road-1	150	150
4	Cross Road-2	150	150
5	Cross Road-3	150	150
6	Cross Road-4 (LHS)	150	150
7	Cross Road-5 (RHS)	150	150
8	Cross Road -6 (LHS)	150	150
9	7th A Cross Road	150	150
10	6th A Cross Road (Amarjyothi Layout)	150	150
11	6th A Cross Road (Cross Road 1)	150	150
12	6th A Cross Road (Cross Road-2)	150	150
13	6th A Cross Road (Cross Road-3)	150	150
	N R Bike Point Road		
14	Cross Road-1	150	150
15	Cross Road-2	150	150
16	Cross Road-3	150	150
17	Cross Road-4	150	150
18	Cross Road-5	150	150
	Sadiq Layout		
19	3rd Cross Road (left Side)	150	150
20	4th Cross Road(Left Side)	150	150
21	5th Cross Road (LHS)	150	150
22	5th CrossRoad (RHS)	150	150
23	Mamatha Medicals Road (LHS)	150	150
24	1st Cross Road (RHS) Near Mamatha Clinic	150	150
25	Fathima Furniture Opp Road (RHS)	150	150
	Fathima Furniture Road		
26	Cross Road-1	150	150

27	Cross Road-2	150	150
28	M S Pharma Opp Road	150	150
29	Cross Road	150	150
30	Cross Road-2	150	150
31	Cross Road	150	150
32	Cross Road	150	150

3.3. Improvement Proposal for Side Drains

Adequate drainage is a primary requirement for maintaining the structural soundness and functional efficiency of a road in addition to preserving the valuable road assets created. Pavement structure including subgrade must be protected from any ingress of water, otherwise over a period of time it may weaken the sub grade by saturating it and cause distress in the pavement structure. Hence, rapid dispersal of water from pavement and sub grade is a basic consideration in road design. Also, quick drainage takes away the water from pavement's surface and reduces chances of skidding of vehicles.

The requirements of road drainage are essentially based on IRC: SP-42-" Guidelines on Road Drainage" and IRC:SP-50 -"Guidelines on Urban Drainage". Camber of 3.0 is provided for the carriageway. For longitudinal drains, a minimum longitudinal gradient of 0.3 percent shall be ensured for satisfactory drainage.

3.4. Improvements Related to Utility, Road Furniture and Appurtenances

Utility and Importance of the Road are greatly enhanced by installing Road Furniture and Appurtenances at appropriate locations along the Project Road, which ensures Improved Road Safety. Planning and Design of Road Furniture and Appurtenances are as per the Guidelines stipulated in IRC. Detailing of each of these Components has been done so that to integrate the same with the Road Improvement Scheme.

COST ESTIMATES

CHAPTER - 4

COST ESTIMATES

4.1. Detailed Cost Estimate

Detailed cost estimate for various works listed in "Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division" has been worked out based on detailed engineering design.

4.2. General

Cost Estimate is an important part of the DPR as it provides vital input to financial evaluation of the project. The cost estimates have been prepared for strengthening of the existing road, repairs and improvements to longitudinal drains, road furniture and appurtenances.

4.3. Basic rates

As part of Detailed Project Report, Rate Analysis of each of the item has been prepared by adopting PW, P & IWTD SR 2018-19, Bangalore Circle. The rates as given in PW, P & IWTD SR are to be enhanced by 6% for additional weight age for the works to be executed under extra ordinary conditions for Bangalore Metropolitan Limits. Items not covered in NHSR / PW, P & IWTD SR have been based on market rates.

4.4. Utility Relocation

Provision of 1.5% of Construction cost is made in the cost estimated for raising and or shifting electric supply lines, telephone lines, OFC lines and other utilities.

4.5. Project Management and Quality Control

Provision of 2.0% of Construction Cost has been made towards Cost of DPR Preparation, PMC and Proof Checking.

4.6. Project Cost

The total project cost for ***Preparation of DPR for*** "Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division" is 5,00,00,000.00 and the Detailed Cost Estimate is enclosed.

DETAILED ESTIMATE

Description of work	Unit	Mesurement				Qty	Rate	Amount
		No.	L	B	D			
4th Cross Road(Left Side)	Cum	1	80.00	4.50	0.15	54.00		
5th Cross Road (LHS)	Cum	1	82.00	4.40	0.15	54.12		
5th CrossRoad (RHS)	Cum	1	19.00	4.80	0.15	13.68		
Mamatha Medicals Road (LHS)	Cum	1	23.00	4.00	0.15	13.80		
1st Cross Road (RHS) Near Mamatha Clinic	Cum	1	45.00	5.00	0.15	33.75		
Fathima Furniture Opp Road (RHS)	Cum	1	45.00	5.00	0.15	33.75		
Fathima Furniture Road								
Cross Road-1	Cum	1	37.00	4.80	0.15	26.64		
Cross Road-2	Cum	1	29.50	5.50	0.15	24.34		
M S Pharma Opp Road	Cum	1	55.00	3.20	0.15	26.40		
Cross Road	Cum	1	33.00	3.20	0.15	15.84		
Cross Road-2	Cum	1	44.00	3.80	0.15	25.08		
Cross Road	Cum	1	97.00	4.50	0.15	65.48		
Cross Road	Cum	1	109.00	4.20	0.15	68.67		
Total						1012.72	6002.32	6078659.00
							Grand Total	43748400.00
							GST Charges (12% of estimated cost)	5249808.00
							DPR Charges (1% of estimated cost)	500000.00
							Project management And Consultancy Charges(1% of estimated cost)	500000.00
							Miscellenious and rounding	1792.00
							Total Amount	50000000.00
							RUPEES FIVE CRORE ONLY	

CERTIFICATE:

1) The work spot has been inspected and found to be necessary
2) The work spot comes under B.B.M.P
3) The provisions made in the estimate are necessary and minimum
4) The estimate is based on C.S.R of 2018-2019,Issue rates and Data Rates.

Assistant Engineer
BBMP

Assistant Executive Engineer
BBMP

Executive Engineer
(ಬ್ಯಾ.ದಿ).BBMP

RUDRAPRASAD CONSULTANTS BANGALORE

Technical Sanction
Accorded For Rs500.00 lakhs only
Head of A/C P
CER NO : 51 Dt: 01-AE-2021

ADMINISTRATIVE APPROVAL
Accorded For Rs. Rs. 500.00 lakhs only
Head of A/c P0541,
Div. Ref. No. 22 Date 30/03/22
EE(BTP)

Rate Analysis

BRUHAT BANGALORE MAHANAGARA PALIKE

NAME OF WORK:- Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.66 Byatarayanapura Sub Division

RATE ANALYSIS

Sl No	Description.	Unit	Page S.R 2018-19	Item No S.R 2018-19	Basic rate	Lift charges	Total	AW @ 6%	Total Rate
1	Earthwork excavation by manual means for roads, drains & similar works in ordinary soil excavated surface levelled and sides neatly dressed, the disposed earth to be levelled neatly after breaking of clods complete as per specifications and directions of the Engineer in charge.	Cum	143	19.10 19.1	130.00	69.80	199.80	7.80	207.60
2	Providing and laying Plain cement concrete of mix 1:3:6 with OPC @ 220kgs, with crushed 40mm and down size graded granite metal coarse aggregates @0.89cum and fine aggregates @ 0.46cum, in foundation mechanically mixed, placed in foundation and compacted by vibration including curing for 14 days including cost of all materials, labour, HOM curing, form works, scaffolding and centering complete as per specifications and directions of the Engineer in charge.	Cum	222	27.18	5571.24	-	5571.24	334.27	5906.51
3	Providing laying plain/ reinforced cement concrete for side Drains Using M20 nominal mix Concrete with OPC at 300kgs.With 20mm and Down size granite metal coarse aggregate at 0.69cum and fine aggregate at 0.43cum Machne mixed, well compacted for wall and Bottom including centering shuttering,cost of materials,HOM of Machinery,Curing Etc.,Complete Excluding cost of Steel as per morth MORTH specification No. 1500, 1700, 2200. Including Cost of material, Labour, HOM complete as per Specification- and directions of the Engineer in charge.	Cum	271	37.59.2	7292.14	-	7292.14	437.53	7729.67

Sl No	Description.	Unit	Page S.R 2018-19	Item No S.R 2018-19	Basic rate	Lift charges	Total	AW @ 6%	Total Rate
4	Providing T.M.T bars Fe 500 steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications and directions of the Engineer in charge.	Tonne	229	28.8.2	85468	–	85468.00	5128.08	90596.08
5	Providing and Fixing pre cast covering Slab made out of CC 1:2:4 with 10cm thick and Finishing cutting ,including form work,curing,including cost of alll materials, labour,hire charges of machinery ,loading ,unloading, lead and lift,transportation etc ,complete. and directions of the Engineer in charge. (Data Rate)	Sqm	–	–	–	–	1922.00	–	1922.00
6	Providing and Fixing pre cast covering Slab 250mm thick made out of CC 1:2:4 and jelly 20mm Down size with steel reinforcement including form work,curing,including cost of alll materials, labour,hire charges of machinery, loading, unloading, lead and lift,transportation etc ,complete. and directions of the Engineer in charge. (Data Rate)	Sqm	–	–	–	–	5418.00	–	5418.00
7	Providing and fixing pre cast solid cement concrete kerb stones made out of CC 1:2:4 with top and bottom width 114 and 165 mm respectively, 400mm high and 450mm in length finished with CM 1:3 plastering and finishing cutting including formwork, curing, including cost of materials, labour charges of machinery, loading and unloading, lead and lift, transportation ete.,complete as per specifications and directions of the Engineer in charge.	Nos	27	5.30	408.00	–	408.00	24.48	432.48
8	Painting two coats after filling the surface with synthetic enamel paint in approved shades on new plastered concrete surfaces, with materials, labour complete as per specifications and directions of the Engineer in charge.	Sqm	180	24.10	80.00	–	80.00	4.80	84.80

Sl No	Description.	Unit	Page S.R 2018-19	Item No S.R 2018-19	Basic rate	Lift charges	Total	AW @ 6%	Total Rate
9	Excavation for roadwork in all types of soil by mechanical means including cutting and loading to tippers, trimming bottom and side slopes, in accordance with requirements of lines, grades and cross sections, and transportation with a lead of 1.00 km and complete as per specifications and directions of the Engineer in charge.	Cum	143	19.14	41.00	12.80	53.80	2.46	56.26
10	Compaction of original ground by mechanical means including filling in depression occuring during rolling including cost of all labour, HOM complete as per specifications.and directions of the Engineer in charge.	Cum	147	19.64	6.00	–	6.00	0.36	6.36
11	Construction of granular sub-base Grading-V as Sub-base and drainage layer by providing coarse graded crushed stone aggregates of granite/ trap/basalt material, mixing in a mechanical mix plant at OMC, Carriage of mixed material to work site, spreading in uniform layers with motor grader on prepared surface and compacting with vibratory power roller to achieve the 98 % proctor density, complete as per specifications and directions of the Engineer in charge.	Cum	153	20.50	1882.00	–	1882.00	112.92	1994.92
12	Providing and Constructing dry lean cement concrete mix CC1:5:10 Base with OPC 25mm and down size graded granite metal coarse aggregate at 0.86cum and fine aggregates @ 0.58cum over a prepared sub-base coarse and fine aggregate conforming to IS: 383-2016, aggregate cement ratio not to exceed 15:1. Aggregate gradation after blending to be as per Table 600-1, optimum moisture content to be determined during trial length construction, concrete strength not to be less than 10 Mpa at 7 days, mixed in a batching plant, transported to site, laid with a paver with electronic sensor, compacting with 8-10 tonnes vibratory roller, finishing and curing complete as per specifications and directions of the Engineer in charge.	Cum	174	22.1.2	3976.07	0.00	3976.07	238.56	4214.63

Sl No	Description.	Unit	Page S.R 2018-19	Item No S.R 2018-19	Basic rate	Lift charges	Total	AW @ 6%	Total Rate
13	Cement concrete pavement.Construction of un-reinforced plain cement concrete pavement, using a grade concrete M30 over a prepared base with OPC coarse aggregate @ 0.69cum fine aggregate @ 0.46cum,coarse and fine aggregate confirming to IS:383-2016,with superplastisiser @3lts confirming to IS9103-2008mixed in a concrete mixer of not less than 0.6 cum capacity and appropriate weigh batcher as per approved mix design, laid in approved fixed side form work (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the form work as per drawing). Spreading the concrete with shovels, rackers compacted using needle, screed and plate vibrator and finished in a continuous operation including provision of contraction, expansion, construction and longitudinal joints including groove cutting charges, joint filler, separation membrane, selant primer, joint sealant, admixtures as approved, curing compound, finishing to lines and grades, textured with texturing machine,and curing including cost of all materials,labour,hire chargedof machines,all lead and lift charges etc., complete as per specifications. and directions of the Engineer in charge.	Cum	176	22.6.1	5662.57	–	5662.57	339.75	6002.32

Asst Engineer
ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

RUDRAPRASAD CONSULTANTS BANGALORE

ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ., ಬೆಂಗಳೂರು-26

Executive Engineer

Sl. NO	Specification No	Units	Rate Considered in 2018-19 SR from 10-10-2018 to 09-04-2019	Rate of per bag of Cement Considered in 2018-19 SR from 10-10-2018 to 09-04-2019	Rate of per bag of Cement wef 02-11-2021	Qty Of Cement used in (Kgs) per Cum of Cencrete as per SR 2018-19 Specification	no of Bags of Cement used	Amout in Rs considering Rate per bag as per 2018-19 SR From 10-10-2018 to 09-04-2019 for No. of bags used in one Cum of Concrete	Amout in Rs. considering Rate per bag wef 02-11-2021 for No. of bags used in one Cum of Concrete	Rate Considered in 2018-19 SR wef 02-11-2021
			[1]	[2]	[3]	[4]	[5]=[4]/50	[6]=[5]x[2]	[7]=[5]x[3]	[8]=[1]-[6]+[7]
1	22.6.1	Cum	4916	245.31	349.00	360	7.2	1766.232	2512.8	5662.57
2	27.18	Cum	5115	245.31	349.00	220	4.4	1079.364	1535.6	5571.24
3	37.59.2	Cum	6670	245.31	349.00	300	6	1471.86	2094	7292.14
4	22.1.2	Cum	3665	245.31	349.00	150	3	735.93	1047	3976.07

RUDRAPRASAD CONSULTANTS BANGALORE

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಧಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ., ಬೆಂಗಳೂರು-24

DRAFT TENDER SCHEDULE

BRUHAT BANGALORE MAHANAGARA PALIKE

NAME OF WORK:- Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division

DRAFT TENDER SCHEDULE

Item No	Description of Work	Unit	Total Quantity as per Estimation	Rate as per estimate in Rs.	
				In Figures	In Words
1	Earthwork excavation by manual means for roads, drains & similar works in ordinary soil excavated surface levelled and sides neatly dressed, the disposed earth to be levelled neatly after breaking of clods complete as per specifications and directions of the Engineer in charge.	Cum	3374.84	207.60	Rupees Two Hundred Seven and Sixty Paise Only
2	Providing and laying Plain cement concrete of mix 1:3:6 with OPC @ 220kgs, with crushed 40mm and down size graded granite metal coarse aggregates @0.89cum and fine aggregates @ 0.46cum, in foundation mechanically mixed, placed in foundation and compacted by vibration including curing for 14 days including cost of all materials, labour, HOM curing, form works, scaffolding and centering complete as per specifications and directions of the Engineer in charge.	Cum	583.84	5905.51	Rupees Five Thousand Nine Hundred Five and Fifty One Paise Only
3	Providing laying plain/ reinforced cement concrete for side Drains Using M20 nominal mix Concrete with OPC at 300kgs.With 20mm and Down size granite metal coarse aggregate at 0.69cum and fine aggregate at 0.43cum Machne mixed, well compacted for wall and Bottom including centering shuttering,cost of materials,HOM of Machinery,Curing Etc.,Complete Excluding cost of Steel as per morth MORTH specification No. 1500, 1700, 2200. Including Cost of material, Labour, HOM complete as per specifications and directions of the Engineer in charge.	Cum	1328.69	7729.67	Rupees Seven Thousand Seven Hundred Twenty Nine and Sixty Six Paise Only
4	Providing T.M.T bars Fe 500 steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications and directions of the Engineer in charge.	tonne	99.30	90596.08	Rupees Ninety Thousand Five Hundred Ninety Six and Eight Paise Only
5	Providing and Fixing pre cast covering Slab made out of CC 1:2:4 with 10cm thick and Finishing cutting ,including form work,curing,including cost of alll materials, labour,hire charges of machinery,loading,unloading,lead and lift,transportation etc ,complete as per specifications and directions of the Engineer in charge.. (Data Rate)	Sqm	2936.40	1922.00	Rupees One Thousand Nine Hundred Twenty Two Only
6	Providing and Fixing pre cast covering Slab 250mm thick made out of CC 1:2:4 and jelly 20mm Down size with steel reinforcement including form work,curing,including cost of alll materials, labour,hire charges of machinery, loading, unloading, lead and lift,transportation etc ,complete as per specifications and directions of the Engineer in charge.(Data Rate)	Sqm	177.12	5418.00	Rupees Five Thousand Four Hundred Eighteen Only
7	Providing and fixing pre cast solid cement concrete kerb stones made out of CC 1:2:4 with top and bottom width 114 and 165 mm respectively, 400mm high and 450mm in length finished with CM 1:3 plastering and finishing cutting including formwork, curing, including cost of materials, labour charges of machinery, loading and unloading, lead and lift, transportation ete.,complete as per specifications and directions of the	Nos	2566.00	432.48	Rupees Four Hundred Thirty Two and Forty Eight Paise Only
8	Painting two coats after filling the surface with synthetic enamel paint in approved shades on new plastered concrete surfaces, with materials, labour complete as per specifications and directions of the Engineer in charge.	Sqm	461.80	84.80	Rupees Eighty Four and Eighty Paise Only

Item No	Description of Work	Unit	Total Quantity as per Estimation	Rate as per estimate in Rs.	
				In Figures	In Words
9	Excavation for roadwork in all types of soil by mechanical means including cutting and loading to tippers, trimming bottom and side slopes, in accordance with requirements of lines, grades and cross sections, and transportation with a lead of 1.00 km and complete as per specifications and directions of the Engineer in charge.	Cum	3038.15	56.26	Rupees Fifty Six and Twenty Six Paise Only
10	Compaction of original ground by mechanical means including filling in depression occuring during rolling including cost of all labour, HOM complete as per specifications and directions of the Engineer in charge.	Sqm	6751.45	6.36	Rupees Six and Thirty Six Paise Only
11	Construction of granular sub-base Grading-V as Sub-base and drainage layer by providing coarse graded crushed stone aggregates of granite/ trap/basalt material, mixing in a mechanical mix plant at OMC, Carriage of mixed material to work site, spreading in uniform layers with motor grader on prepared surface and compacting with vibratory power roller to achieve the 98 % proctor density, complete as per specifications and directions of the Engineer in charge.	Cum	1012.72	1994.92	Rupees One Thousand Nine Hundred Ninety Four and Ninety Two Paise Only
12	Providing and Constructing dry lean cement concrete mix CC1:5:10 Base with OPC 25mm and down size graded granite metal coarse aggregate at 0.86cum and fine aggregates @ 0.58cum over a prepared sub-base coarse and fine aggregate conforming to IS: 383-2016, aggregate cement ratio not to exceed 15:1. Aggregate gradation after blending to be as per Table 600-1, optimum moisture content to be determined during trial length construction, concrete strength not to be less than 10 Mpa at 7 days, mixed in a batching plant, transported to site, laid with a paver with electronic sensor, compacting with 8-10 tonnes vibratory roller, finishing and curing complete as per specifications and directions of the Engineer in charge.	Cum	1012.72	4214.63	Rupees Four Thousand Two Hundred Fourteen and Sixty Three Paise Only
13	Cement concrete pavement.Construction of un-reinforced plain cement concrete pavement, using a grade concrete M30 over a prepared base with OPC coarse aggregate @ 0.69cum fine aggregate @ 0.46cum,coarse and fine aggregate confirming to IS:383-2016,with superplastisiser @3lts confirming to IS9103-2008mixed in a concrete mixer of not less than 0.6 cum capacity and appropriate weigh batcher as per approved mix design, laid in approved fixed side form work (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the form work as per drawing). Spreading the concrete with shovels, rackers compacted using needle, screed and plate vibrator and finished in a continuous operation including provision of contraction, expansion, construction and longitudinal joints including groove cutting charges, joint filler, separation membrane, selant primer, joint sealant, admixtures as approved, curing compound, finishing to lines and grades, textured with texturing machine,and curing including cost of all materials,labour,hire chargedof machines,all lead and lift charges etc., complete as per specifications and directions of the Engineer in charge.	Cum	1012.72	6002.32	Rupees Six Thousand Two and Thirty Two Paise Only

"DTS APPROVED"
" NO OF CORRECTION NIL "

Executive Engineer
ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು,
BBMP
(ಪ್ರ್ಯಾ.ವಿ), ಬೃ.ಬೆ.ಮ.ಪಾ.

ಮುಖ್ಯ ಅಭಿಯಂತರರು
ಯಲಹಂಕ ವಲಯ

BILL OF QUANTITIES

BRUHAT BANGALORE MAHANAGARA PALIKE

NAME OF WORK:- Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division

BILL OF QUANTITIES

Item No	Description of Work	Unit	Total Quantity as per Estimation	Rate as per estimate in Rs.	
				In Figures	In Words
1	Earthwork excavation by manual means for roads, drains & similar works in ordinary soil excavated surface levelled and sides neatly dressed, the disposed earth to be levelled neatly after breaking of clods complete as per specifications and directions of the Engineer in charge.	Cum	3374.84		
2	Providing and laying Plain cement concrete of mix 1:3:6 with OPC @ 220kgs, with crushed 40mm and down size graded granite metal coarse aggregates @0.89cum and fine aggregates @ 0.46cum, in foundation mechanically mixed, placed in foundation and compacted by vibration including curing for 14 days including cost of all materials, labour, HOM curing, form works, scaffolding and centering complete as per specifications and directions of the Engineer in charge.	Cum	583.84		
3	Providing laying plain/ reinforced cement concrete for side Drains Using M20 nominal mix Concrete with OPC at 300kgs.With 20mm and Down size granite metal coarse aggregate at 0.69cum and fine aggregate at 0.43cum Machne mixed, well compacted for wall and Bottom including centering shuttering,cost of materials,HOM of Machinery,Curing Etc.,Complete Excluding cost of Steel as per morth MORTH specification No. 1500, 1700, 2200. Including Cost of material, Labour, HOM complete as per specifications and directions of the Engineer in charge.	Cum	1328.69		
4	Providing T.M.T bars Fe 500 steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications and directions of the Engineer in charge.	tonne	99.30		
5	Providing and Fixing pre cast covering Slab made out of CC 1:2:4 with 10cm thick and Finishing cutting ,including form work,curing,including cost of alll materials, labour,hire charges of machinery,loading,unloading,lead and lift,transportation etc ,complete as per specifications and directions of the Engineer in charge.. (Data Rate)	Sqm	2936.40		
6	Providing and Fixing pre cast covering Slab 250mm thick made out of CC 1:2:4 and jelly 20mm Down size with steel reinforcement including form work,curing,including cost of alll materials, labour,hire charges of machinery, loading, unloading, lead and lift,transportation etc ,complete as per specifications and directions of the Engineer in charge.(Data Rate)	Sqm	177.12		
7	Providing and fixing pre cast solid cement concrete kerb stones made out of CC 1:2:4 with top and bottom width 114 and 165 mm respectively, 400mm high and 450mm in length finished with CM 1:3 plastering and finishing cutting including formwork, curing, including cost of materials, labour charges of machinery, loading and unloading, lead and lift, transportation etc.,complete as per specifications and directions of the	Nos	2566.00		
8	Painting two coats after filling the surface with synthetic enamel paint in approved shades on new plastered concrete surfaces, with materials, labour complete as per specifications and directions of the Engineer in charge.	Sqm	461.80		

Item No	Description of Work	Unit	Total Quantity as per Estimation	Rate as per estimate in ₹	
				In Figures	In Words
9	Excavation for roadwork in all types of soil by mechanical means including cutting and loading to tippers, trimming bottom and side slopes, in accordance with requirements of lines, grades and cross sections, and transportation with a lead of 1.00 km and complete as per specifications and directions of the Engineer in charge.	Cum	3038.15		
10	Compaction of original ground by mechanical means including filling in depression occuring during rolling including cost of all labour, HOM complete as per specifications and directions of the Engineer in charge.	Sqm	6751.45		
11	Construction of granular sub-base Grading-V as Sub-base and drainage layer by providing coarse graded crushed stone aggregates of granite/ trap/basalt material, mixing in a mechanical mix plant at OMC, Carriage of mixed material to work site, spreading in uniform layers with motor grader on prepared surface and compacting with vibratory power roller to achieve the 98 % proctor density, complete as per specifications and directions of the Engineer in charge.	Cum	1012.72		
12	Providing and Constructing dry lean cement concrete mix CC1:5:10 Base with OPC 25mm and down size graded granite metal coarse aggregate at 0.86cum and fine aggregates @ 0.58cum over a prepared sub-base coarse and fine aggregate conforming to IS: 383-2016, aggregate cement ratio not to exceed 15:1. Aggregate gradation after blending to be as per Table 600-1, optimum moisture content to be determined during trial length construction, concrete strength not to be less than 10 Mpa at 7 days, mixed in a batching plant, transported to site, laid with a paver with electronic sensor, compacting with 8-10 tonnes vibratory roller, finishing and curing complete as per specifications and directions of the Engineer in charge.	Cum	1012.72		
13	Cement concrete pavement.Construction of un-reinforced plain cement concrete pavement, using a grade concrete M30 over a prepared base with OPC coarse aggregate @ 0.69cum fine aggregate @ 0.46cum,coarse and fine aggregate confirming to IS:383-2016,with superplastisiser @3lts confirming to IS9103-2008mixed in a concrete mixer of not less than 0.6 cum capacity and appropriate weigh batcher as per approved mix design, laid in approved fixed side form work (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the form work as per drawing). Spreading the concrete with shovels, rackers compacted using needle, screed and plate vibrator and finished in a continuous operation including provision of contraction, expansion, construction and longitudinal joints including groove cutting charges, joint filler, separation membrane, selant primer, joint sealant, admixtures as approved, curing compound, finishing to lines and grades, textured with texturing machine,and curing including cost of all materials,labour,hire chargedof machines,all lead and lift charges etc., complete as per specifications and directions of the Engineer in charge.	Cum	1012.72		

Executive Engineer
BBMP

ANNEXURES

TYPICAL CROSS SECTION

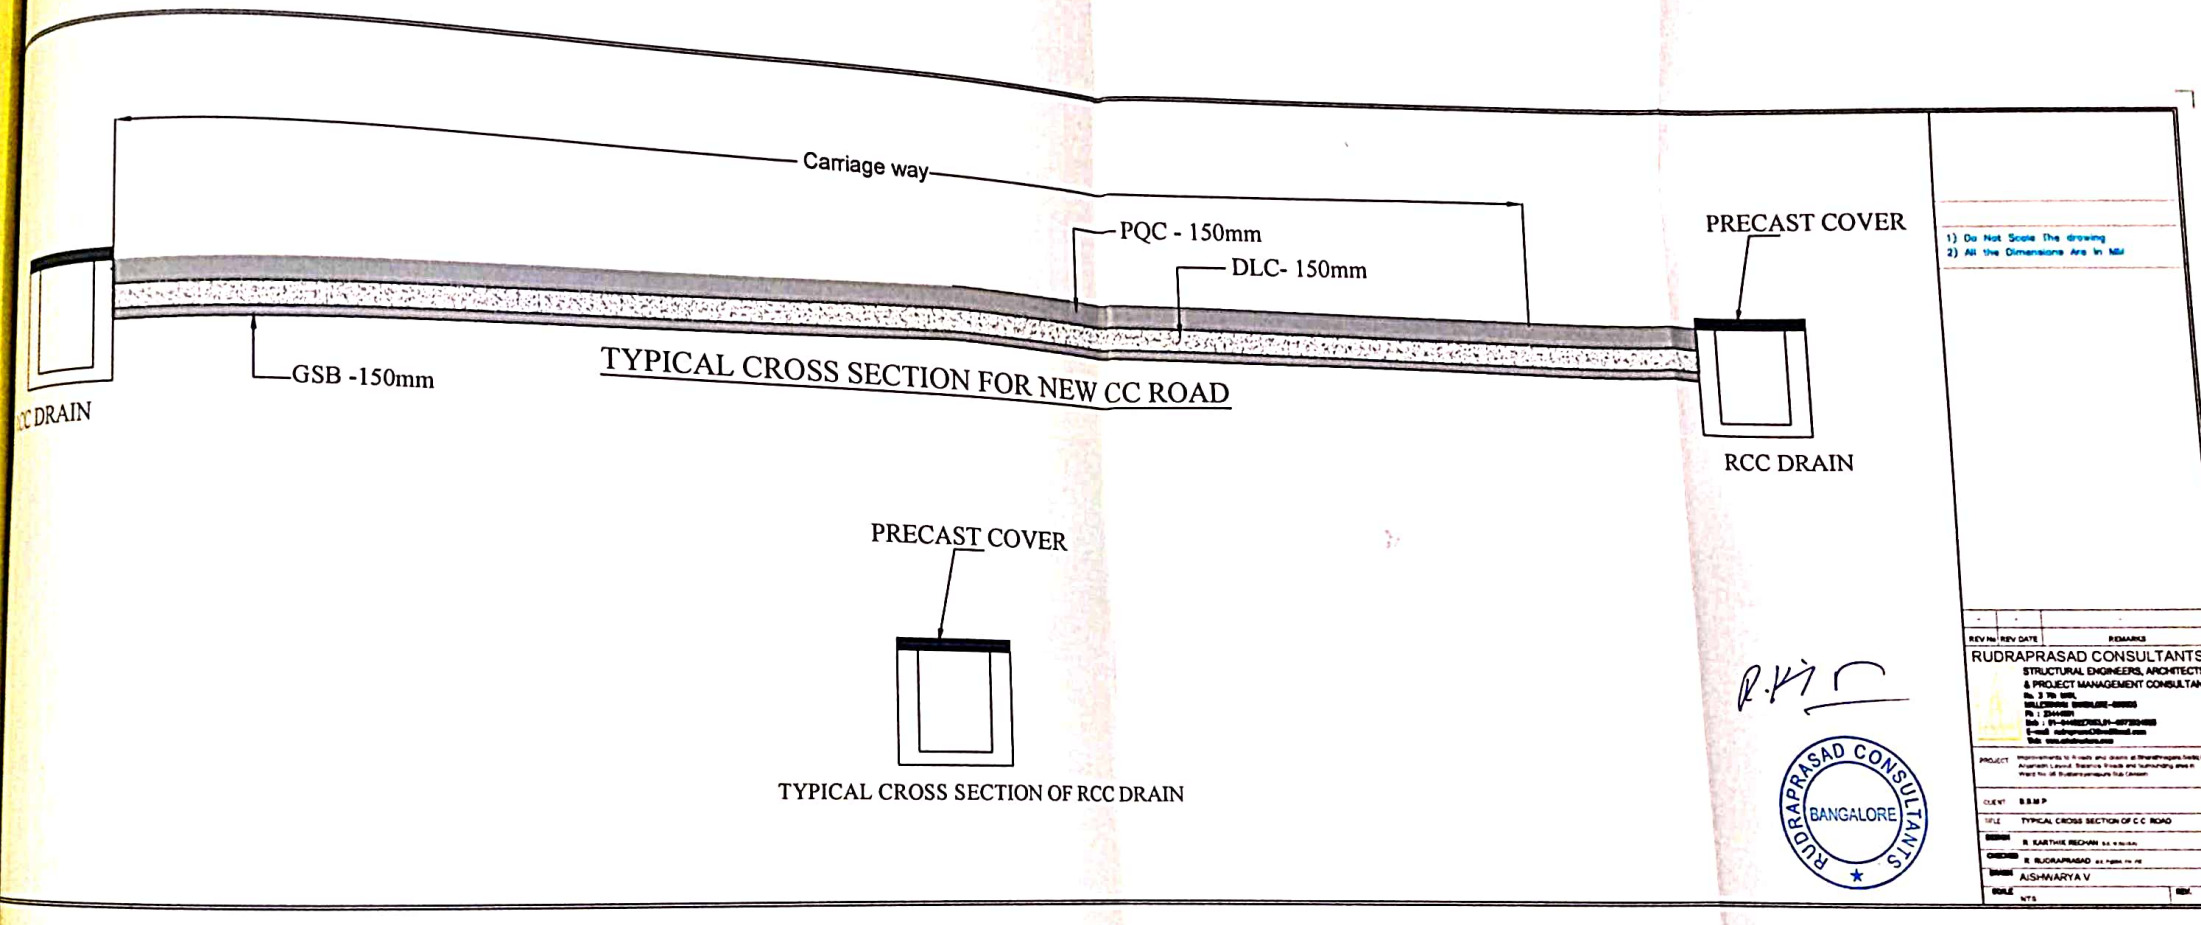
Carriage way
PQC - 150mm
DLC- 150mm
PRECAST COVER
GSB -150mm
TYPICAL CROSS SECTION FOR NEW CC ROAD
RCC DRAIN
PRECAST COVER
TYPICAL CROSS SECTION OF RCC DRAIN
1) Do Not Scale The drawing
2) All the Dimensions Are In Mtr
RUDRAPRASAD CONSULTANTS
STRUCTURAL ENGINEERS, ARCHITECTS
& PROJECT MANAGEMENT CONSULTANTS
BANGALORE
CLIENT BBMP
TYPICAL CROSS SECTION OF C C ROAD
R. KARTHIK RECHAN
R. RUDRAPRASAD
AISHWARYA V
NTS
RD

ROAD PHOTOGRAPHS

IMPROVEMENTS TO ROADS AND DRAINS AT BHARATHNAGARA , SADIQ LAYOUT, ANJANADRI LAYOUT, BALANCE ROADS AND SURROUNDING AREA IN WARD NO.06 BYATARAYANAPURA SUB DIVISION

Rudraprasad Consultants
Structural Engineers, Architects &
Project management consultants

RUDRAPRASAD CONSULTANTS BANGALORE

ಸಮುದಾಯಕ ಅಭಿವೃದ್ಧಿ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರ
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ., ಬೆಂಗಳೂರು-24

IMPROVEMENTS TO ROADS AND DRAINS AT BHARATHNAGARA , SADIQ LAYOUT, ANJANADRI LAYOUT, BALANCE ROADS AND SURROUNDING AREA IN WARD NO.06 BYATARAYANAPURA SUB DIVISION

Rudraprasad Consultants
Structural Engineers, Architects &
Project management consultants

RUDRAPRASAD CONSULTANTS BANGALORE

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

29.2.24

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ., ಬೆಂಗಳೂರು-24

IMPROVEMENTS TO ROADS AND DRAINS AT BHARATHNAGARA , SADIQ LAYOUT, ANJANADRI LAYOUT, BALANCE ROADS AND SURROUNDING AREA IN WARD NO.06 BYATARAYANAPURA SUB DIVISION

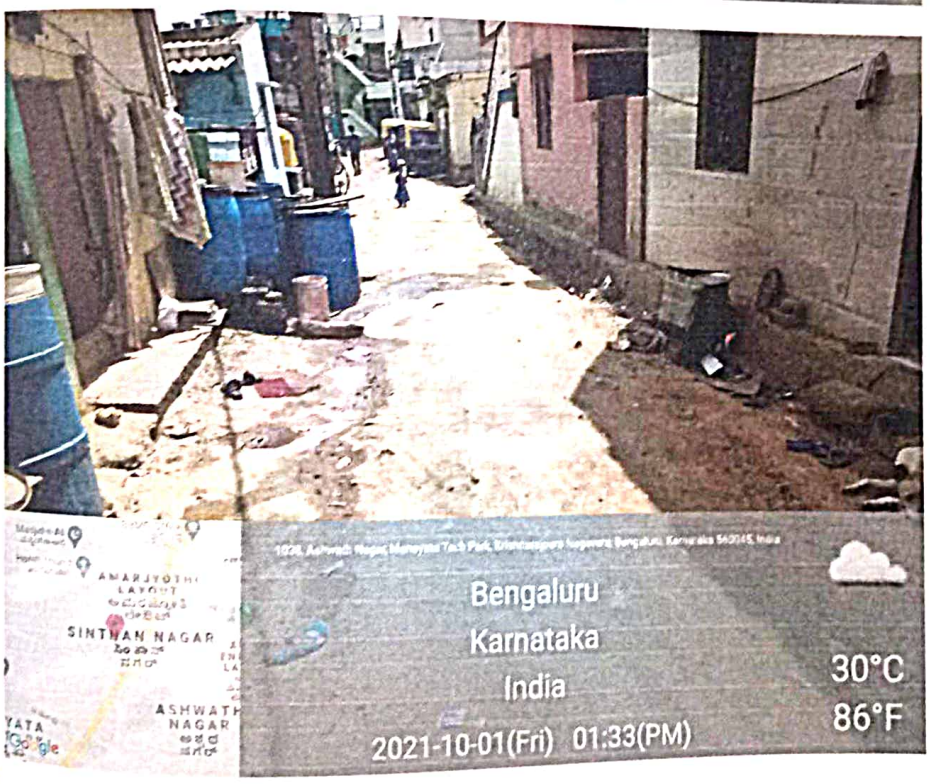

Rudraprasad Consultants
Structural Engineers, Architects &
Project management consultants

RUDRAPRASAD CONSULTANTS BANGALORE

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ, ಬೆಂಗಳೂರು-26

IMPROVEMENTS TO ROADS AND DRAINS AT BHARATHNAGARA , SADIQ LAYOUT, ANJANADRI LAYOUT, BALANCE ROADS AND SURROUNDING AREA IN WARD NO.06 BYATARAYANAPURA SUB DIVISION

Rudraprasad Consultants
Structural Engineers, Architects &
Project management consultants

RUDRAPRASAD CONSULTANTS BANGALORE

ಬಿ.ಬಿ.ಎಂ.ಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ, ಬೆಂಗಳೂರು-26

IMPROVEMENTS TO ROADS AND DRAINS AT BHARATHNAGARA , SADIQ LAYOUT, ANJANADRI LAYOUT, BALANCE ROADS AND SURROUNDING AREA IN WARD NO.06 BYATARAYANAPURA SUB DIVISION

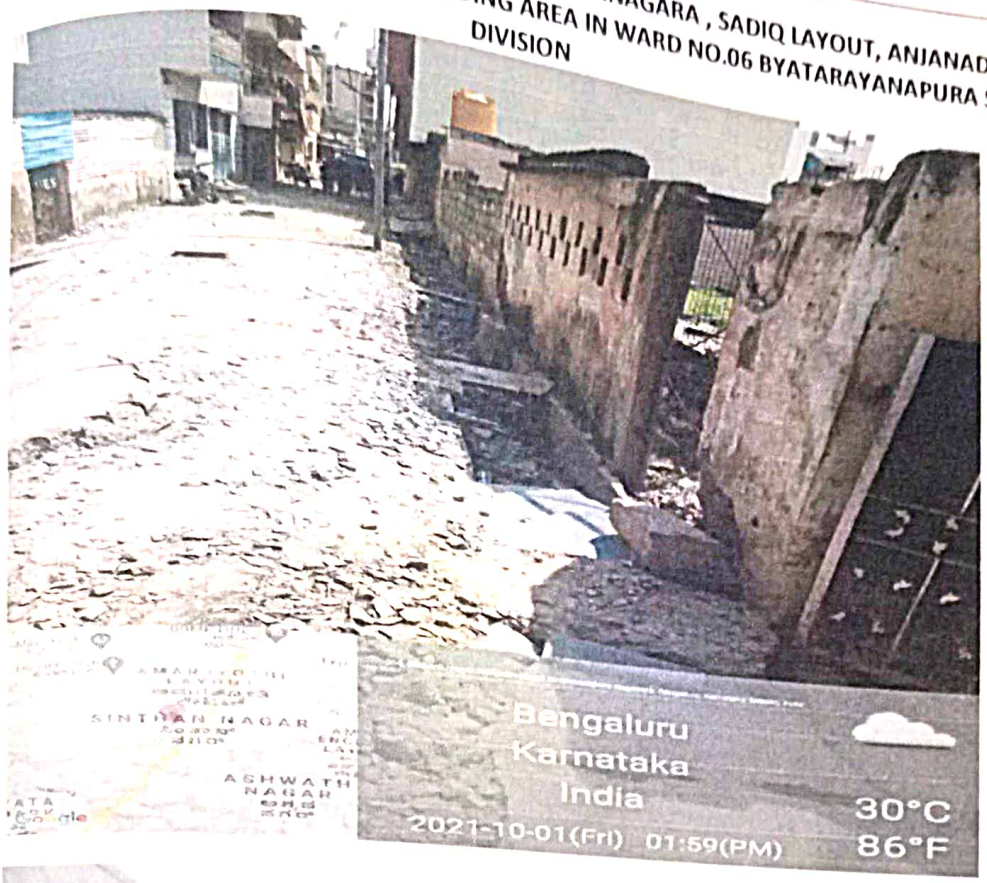

Rudraprasad Consultants
Structural Engineers, Architects &
Project management consultants

RUDRAPRASAD CONSULTANTS BANGALORE

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಕಿರಿಯ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬೆಂಗಳೂರು-24

WARD MAP

BRUHAT BENGALURU MAHANAGARA PALIKE

6-THANISANDRA

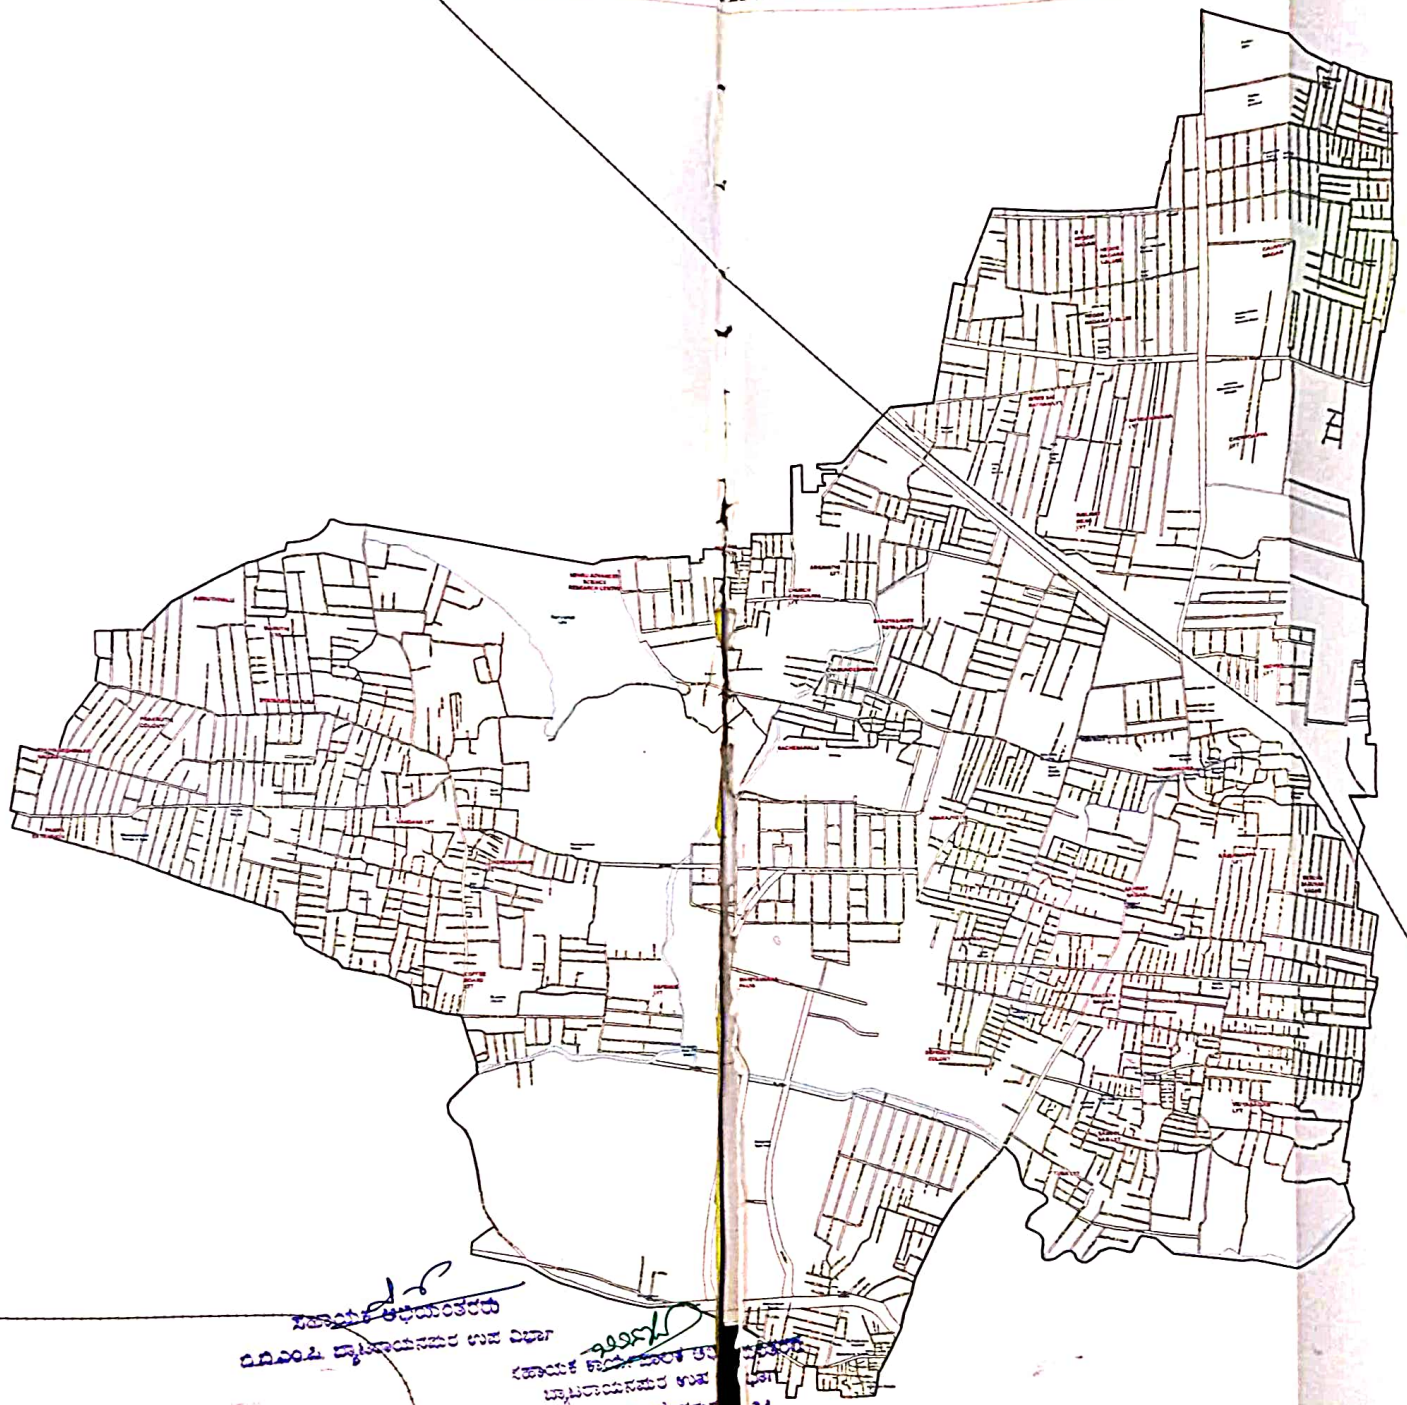

RUDRAPRASAD CONSULTANTS
BANGALORE

KEY MAP

Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division

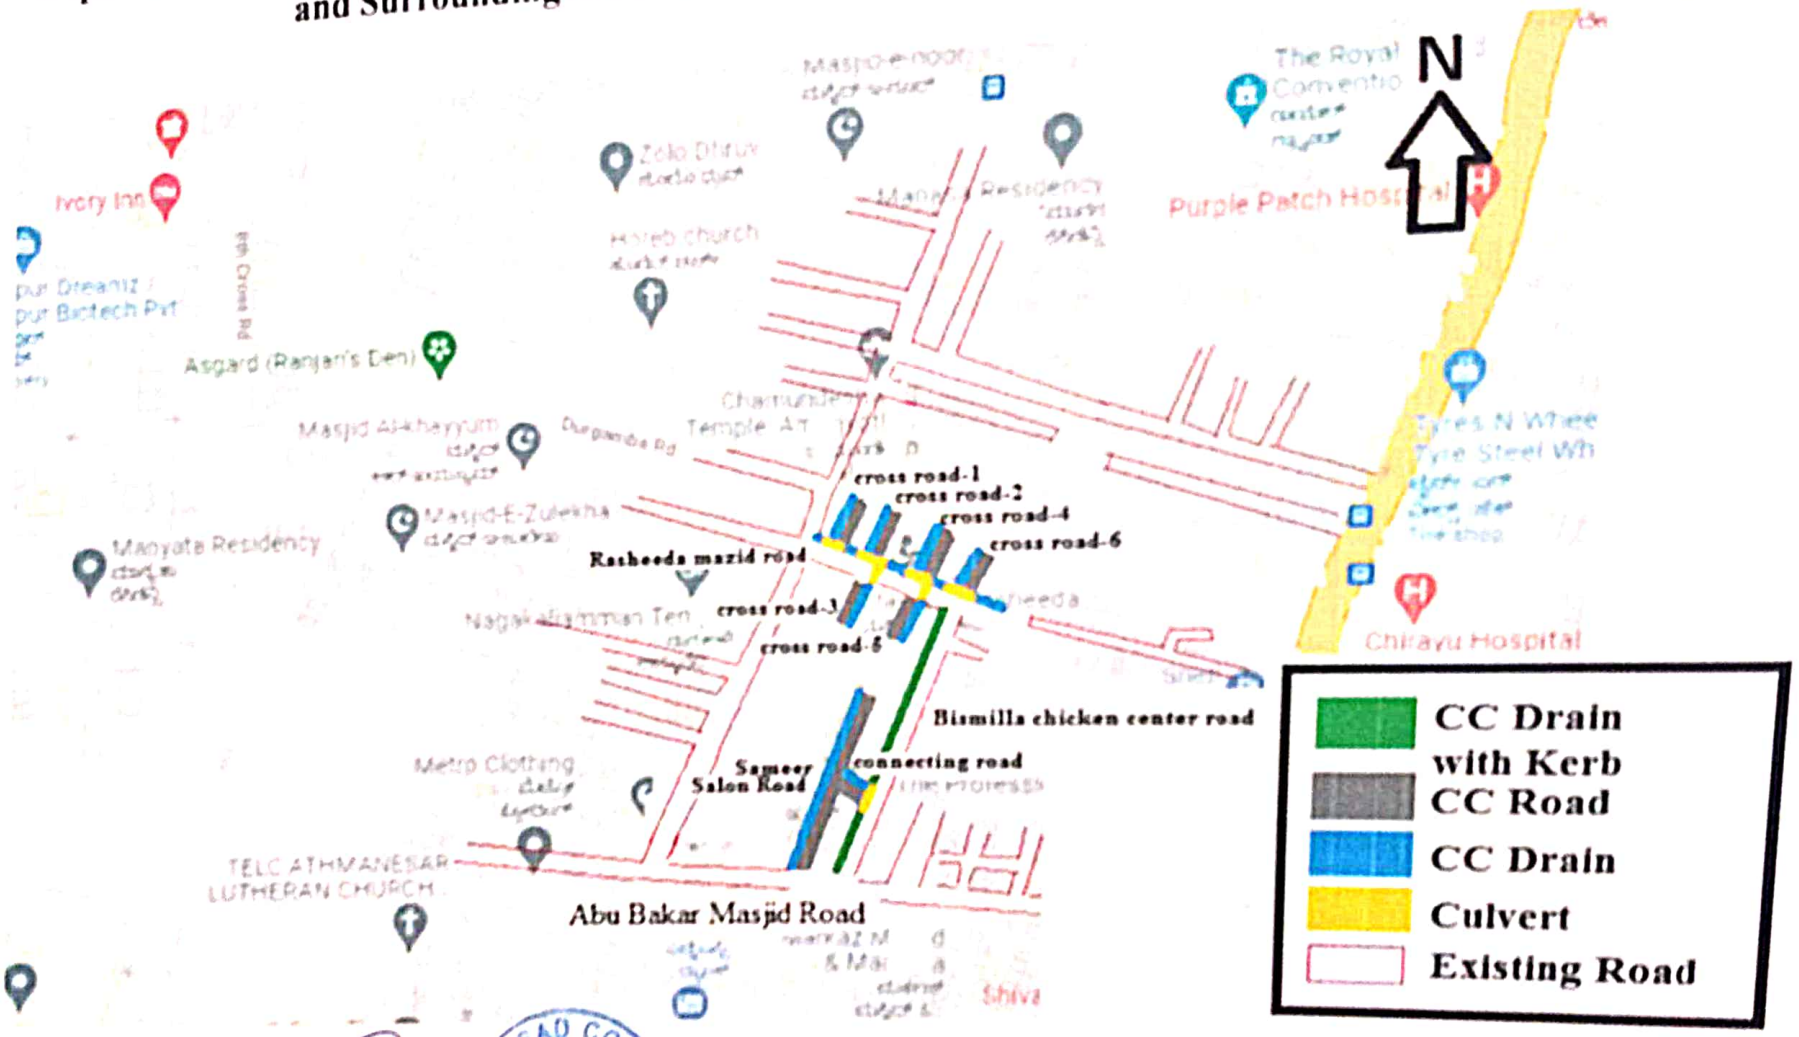

RUDRAPRASAD CONSULTANTS

RUDRAPRASAD CONSULTANTS BANGALORE

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ., ಬೆಂಗಳೂರು-24

Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division

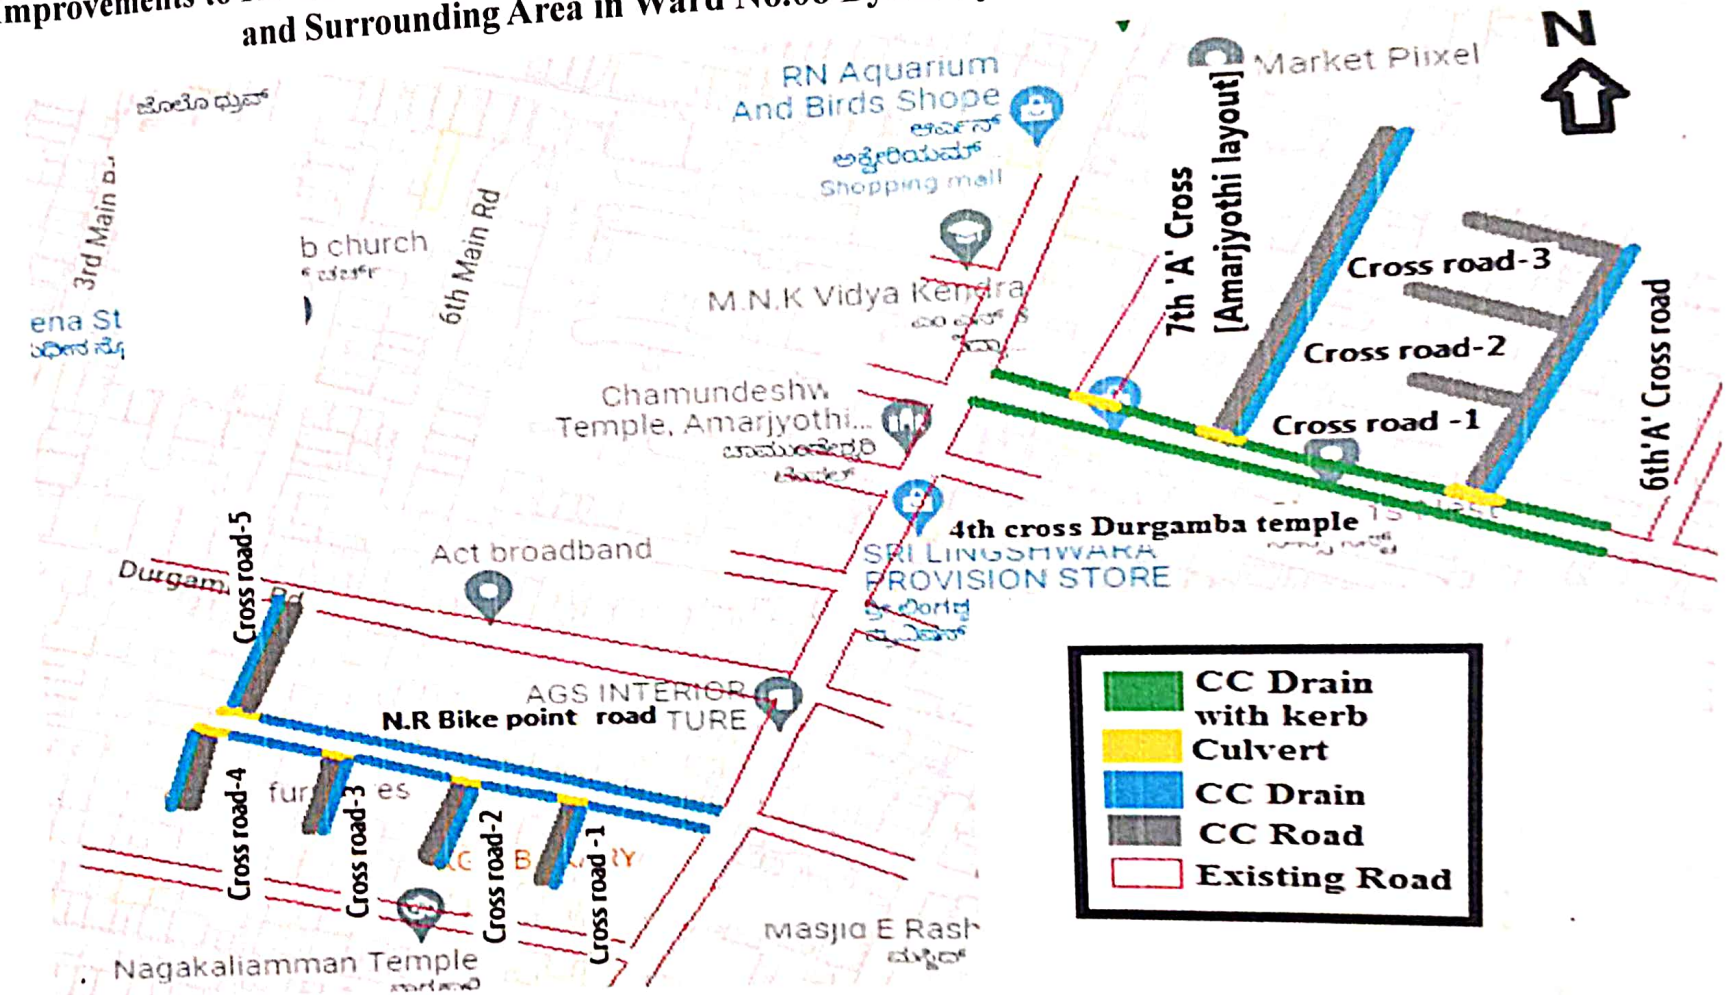

RUDRAPRASAD CONSULTANTS

RUDRAPRASAD CONSULTANTS

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ., ಬೆಂಗಳೂರು-24

Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division

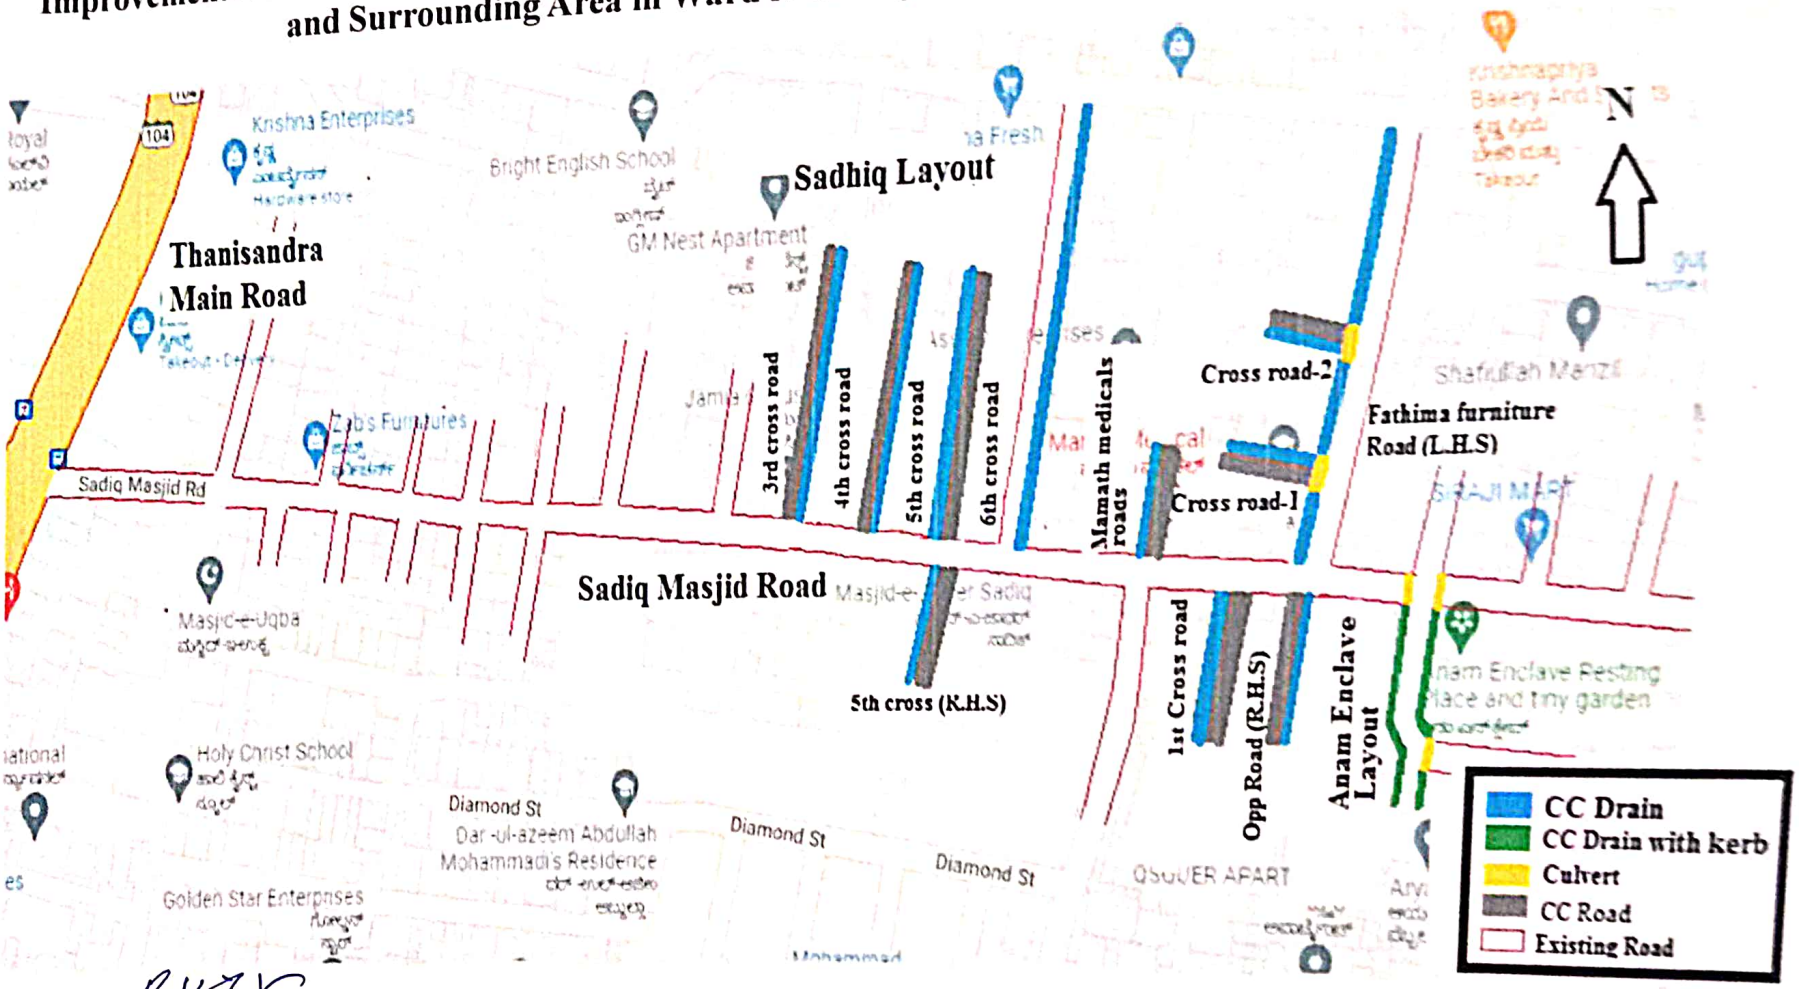

RUDRAPRASAD CONSULTANTS

RUDRAPRASAD CONSULTANTS BANGALORE

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬೆಂಗಳೂರು-24

Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division

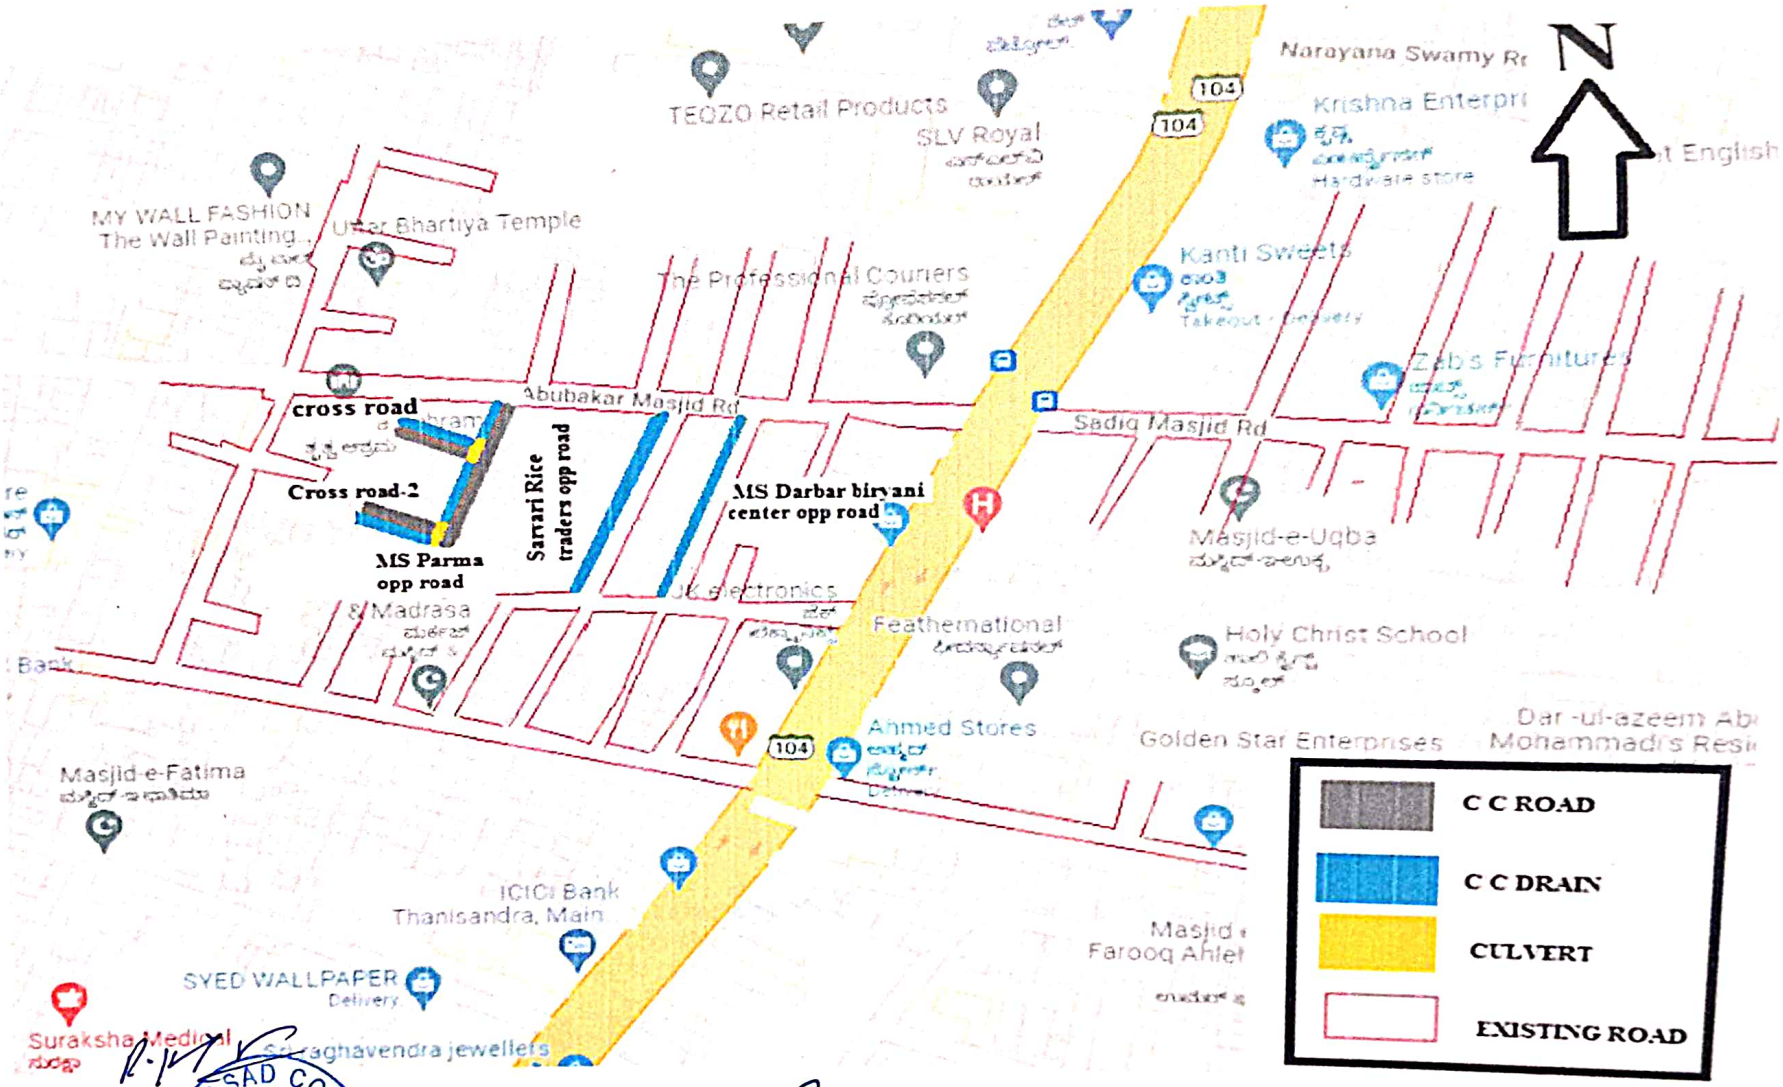

RUDRAPRASAD CONSULTANTS

RUDRAPRASAD CONSULTANTS

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

Improvements to Roads and Drains at Bharathnagara , Sadiq Layout, Anjanadri Layout, Balance Roads and Surrounding Area in Ward No.06 Byatarayanapura Sub Division

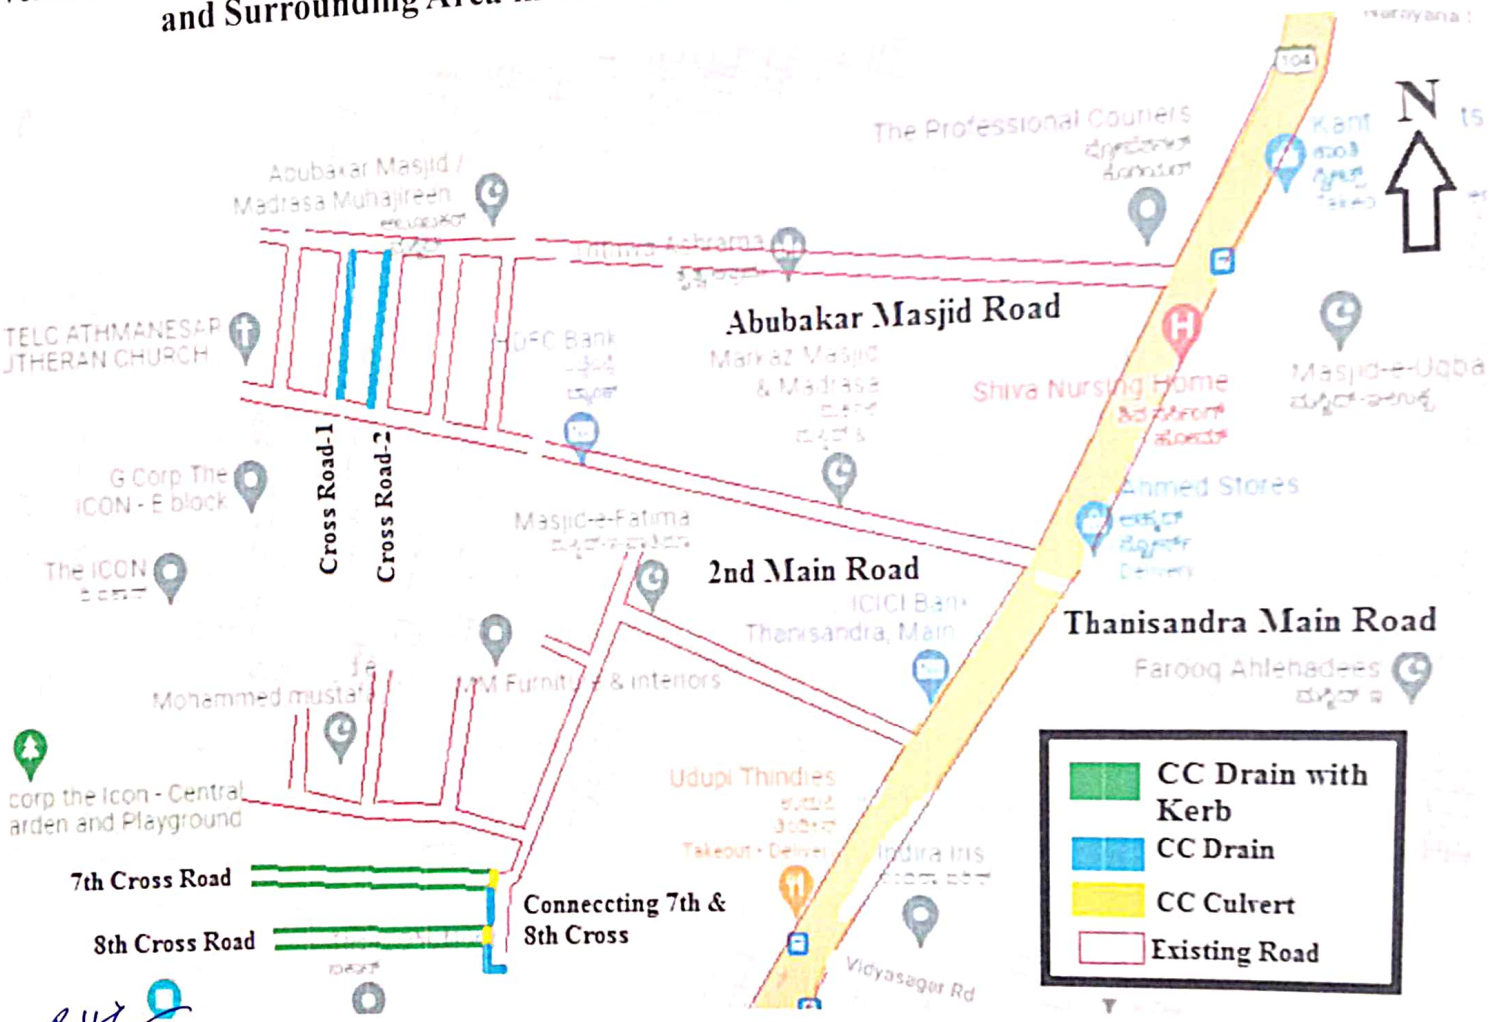

RUDRAPRASAD CONSULTANTS

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

ಸಹಾಯಕ ಕಾರ್ಯ ಪಾಲಕ ಅಭಿಯಂತರರು
ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬೆಂಗಳೂರು-26